



Flow Monitoring Solutions

Contents

Production Specifications	4
Electromagnetic Flow Meter Components	5
Applications	6
Versions, Mounting Arrangements & Accuracy Curves	7-8
Specifications 151 MFM W	9
Ordering Code 151 MFM W	10
Specifications 151 MFM E	11
Ordering Code 151 MFM E	12
Specifications 151 MFM P	13
Ordering Code 151 MFM P	14
Specifications 151 MFM B	15
Ordering Code 151 MFM B	16
Water Balancing Scada	17
Machine to Machine Interface	18
GSM / GPRS Connectivity	19
Installation Guidelines	20-21
Customer Appreciation	22
Our Client's Portfolio	23
Product Overview	24
Solutions For Applications	25
Site Installation	26
Flow Laboratory	27

About SBEM

SBEM was established in 1974 and is India's market leader in Level, Flow and Pressure Instrumentation. With a futuristic approach and a warm beginning in providing Oil Companies, with tank Level Gauging Solutions, SBEM has evolved into an organization offering multiple Products. SBEM Pvt. Ltd. has established itself as a FLOW MEASUREMENT Solutions Provider & it also deals in Automation Packages Business. An ISO 9001:2015 and ISO 45001:2018 certified company with a DSIR approved R & D Centre. SBEM's core strength is its ability to custom design solutions for each Application and Customer's from every Industry including :

Public Health Engineering

PHE Instrumentation Package, WTP Automation Package Over head tanks (OHT), Elevated storage reservoirs (ESR), Reservoirs and Distributed Pipelines. 24 X 7 Water Supply Scheme, STP and Tubewell Applications.

Thermal Power

Steam Turbine, Turbo Generator, Condenser / Heat Exchanger, Condensate Polishing Unit (CPU), Coal Handling Plant (CHP), Ash Handling Plant (AHP), Fuel Oil Handling, DM Plant, Pre Treatment – Water Treatment Plant (PT-WTP), Effluent Treatment Plant (ETP), Cooling Tower and Fire Protection

Indian Navy

Oil Refineries & Gas (End To End)

Cement

Steel

Vision:

To become the Preferred Partner and Solution Provider in the Process Control and Automation Industry

Mission:

To provide Continuous Value Addition to our Customers by offering Reliable, Cost effective and Customized Solutions

SBEM in a capsule:

- Pioneer in Level ,Flow & Pressure Measurement Solutions since 1974
- One of first MSME to obtain ISO 9001:2015 & ISO 45001:2018 certification in India
- Largest number of installed Tank Farm Management Systems in India
- The only 100% indigenous Servo Gauge in 1992
- Integration of Radar Gauges (other makes) with SBEM Tank Farm Management systems
- Indigenously developed Phased Capacitance Level Transmitters and Ultrasonic Switches for Indian Naval Submarines
- Accurate Magnetostrictive Level Probes for Retail Outlet Automation

Certifications :

- ATEX & IECEX Certified Retail Outlet Tank Gauging System as per IEC 60079-0 and IEC 60079-11
- NABL accredited Calibration Laboratory as per ISO/IEC 17025
 - Flow Meter
 - Residential Water Meter
- ISO 4064:2014 / W&M (OIML R49:2013) / Drinking Water Approval
 - * - As per OIMLR49 / ISO4064
- SIL 2 certified 139 Servo Gauge as per IEC 61508
- CE Certified Level Transmitters as per EN Directives

Magflow Meter, 151 MFM

Specifications

- Maximum Range (Velocity): 10 m/s
- Meter Sizes: 15 To 3000 mm
- Process Connection: Flange (ANSI/AWWA/DIN) & Wafer
- Electrode Material: SS/Hastalloy C/Tantalum/Titanium
- Lining Material: Rubber/Neoprene/Hard Rubber/PTFE/ Polyurethane
- Measuring Tube Material: SS 304 / SS 316
- Coil Housing Material: CS/SS 304/SS 316
- Power Supply: 85-265 VAC or 24VDC or Internal Battery
- Analog 4-20 mA superimposed with HART output
- Application: All conductive liquids having Conductivity $\geq 20 \mu\text{S/cm}$
- Empty pipe detection




Product Benefits

- Suitable for all conductive liquids
- No wear & tear, long life
- No pressure loss
- No process losses

Features

- Two Line LCD Display, 16 characters per line Or Graphical LCD display
- High measurement accuracy up to $\pm 0.3\%$
- Available in all types of Electrode material
- Low Power Consumption
- Versions for high temperature up to 150°C
- Integral & Remote Versions
- RS 232/RS 485 (MODBUS Protocol)
- GSM/ GPRS connectivity for communicating field data through SMS on mobile phones and/or control & monitoring through central SCADA system
- In-built data logger
- Built In Self Diagnosis Feature
- Bidirectional Flow Measurement
- Selectable Response Time
- Protection Class
Sensors: IP 67 (Std) / IP 68 (for remote versions only)
Indicator-Converter: IP 67
- Interchangeable Converter
- No earthing rings required because of built in Earthing Electrode
- Earthing Rings in SS 304/SS 316 also available
- Lengths in accordance with ISO : 13359
- Five level Password
- Flameproof and Weatherproof versions

Electromagnetic Flow Meter Components

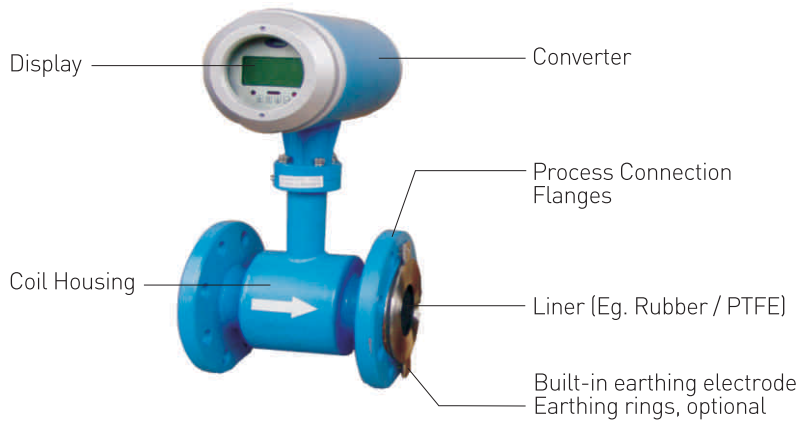

Areas of Application

- Water & Waste Water Management
- Submerged in Water or Buried in Ground
- Chemical, Petrochemical and Process Industries
- Fertilizer Industries
- Mining Industries
- Cement
- Paper and Pulp Industries
- Pharmaceutical Industries
- Food and Drug Industries
- Beverage Industries

Overview

Features/Model	151MFM W	151MFM E	151MFM P	151MFM B
Accuracy	± 0.5%	± 0.3%	± 0.3%	± 0.5 %
Display	2 line LCD, backlit	2 line LCD, backlit	Graphical LCD, backlit	Graphical LCD
4-20 mA current output	Yes	Yes	Yes	No
MODBUS - RS 232	Add-on	Add-on	Add-on	No
MODBUS - RS 485	Add-on	Add-on	Add-on	Add-on
HART	Add-on	Add-on	Add-on	No
GSM - SMS	M2M	M2M	M2M	Add-on
GPRS	M2M	M2M	M2M	Add-on
In-built Data Logger	No	No	Add-on	Add-on
Digital output	1 Pulse / Frequency 1 digital output (configurable)	1 Pulse / Frequency 1 digital output (configurable)	1 Pulse / Frequency 4 digital output	1 Pulse / Frequency 1 digital output (configurable)

For possible combination of outputs, please refer to ordering codes on page nos. 11, 12, 14 and 16



Application

The 151 MFM electromagnetic flow meter has been designed to measure volume flow rates of electrically conductive liquids in closed piping systems. Measurements can be done in both flow directions, with high measurement accuracy over a wide range of flow rates. The minimum required conductivity of the measured medium is 20 $\mu\text{S}/\text{cm}$.

The converter electronic unit includes a display to show the measured values where various operational parameters of the meter can be selected by means of an associated keyboard. Current, frequency / pulse , digital outputs are also available. GSM interface allows sending flow rate and totalised flow through SMS on mobile phones. Wireless communication between flow meter and PC is possible with the GPRS connectivity.

Working

The electromagnetic flow meter consist of a sensor through which the measured liquid flows, and a converter (electronic unit) where the low-level signal from the sensor is amplified for further processing. The output signal is proportional to the volume flow rate of the measured liquid. The electromagnetic flow meters can be applied only where the measured liquid is conductive and non-magnetic. The electromagnetic flow meter can be designed either as an integral device or with the sensor separated from the associated converter (electronic unit). In the Integral type, the electronics is fitted directly onto the sensor and in another case i.e., of remote type, the converter is connected to the sensor by special cable.

Operating Principle

The function of an electromagnetic flow meter is based on Faraday's law of electromagnetic induction. The sensor consists of a non-magnetic and non-conductive tube with two embedded measuring electrodes to pick up the induced voltage. To create an alternating magnetic field, two coils are fitted onto the tube in parallel with the plane defined by the active parts of the measuring electrodes. Now if a conductive liquid flows across magnetic field **B**, voltage **U** will appear on the measuring electrodes proportional to the flow velocity **v** and the distance between conductor **d**.

$$U = B \times d \times v$$


U induced voltage

B magnetic flux density

d distance between the measuring electrodes

v liquid flow velocity



As the magnetic flux density and distance between the electrodes are constant, the induced voltage is proportional to the liquid flow velocity in the tube. The value of the volume flow rate can then be readily determined as a product of the flow velocity and square section of the tube, $Q = v \times S$.

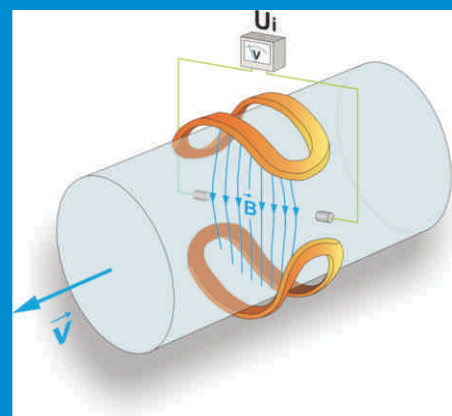



Versions

A) Integral

A.1 Flanged

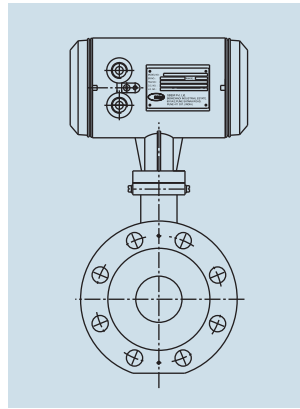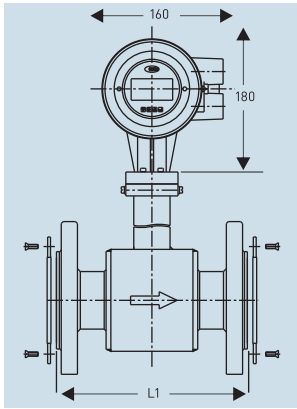


A.2 Wafer

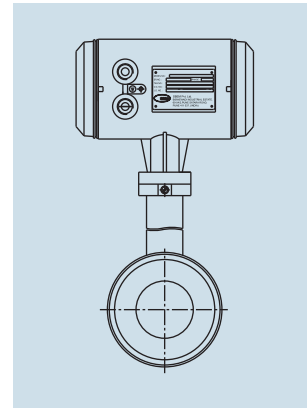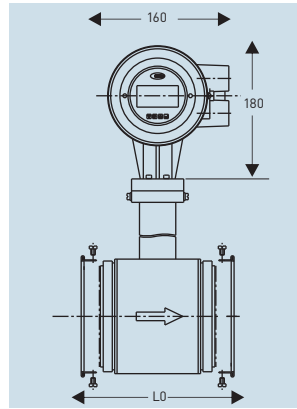


B) Remote - Sensor

B.1 Flanged


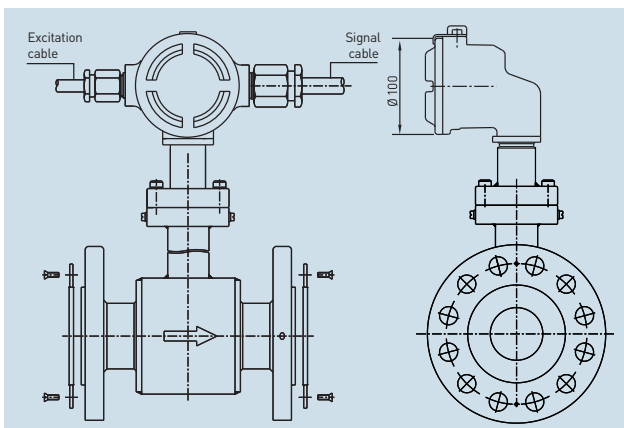


B.2 Wafer

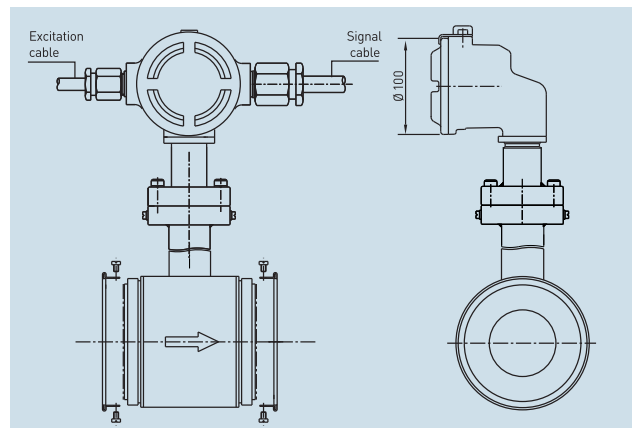


C) Remote - Converter

Pipe Mounting Arrangement

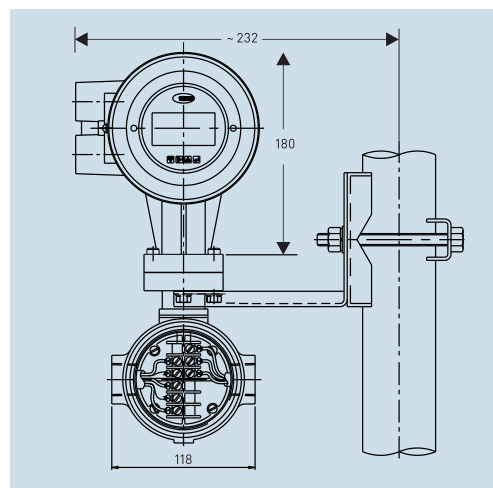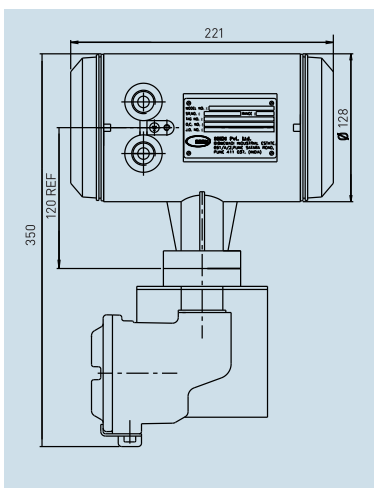


Wall Mounting Arrangement

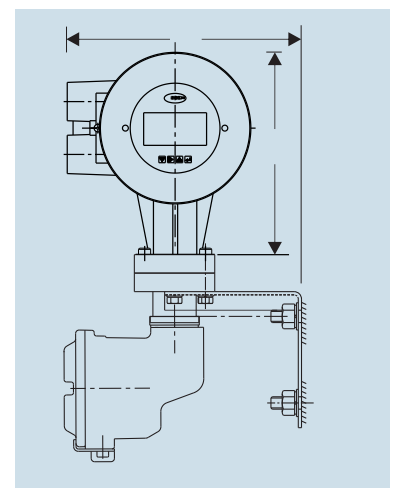


Versions

D) Battery Operated Flow Meter


D.1 Basic Model

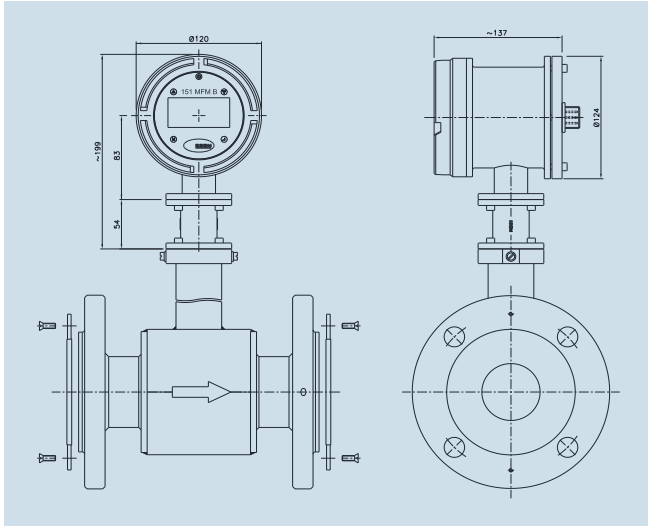



D.2 Add-On Facilities

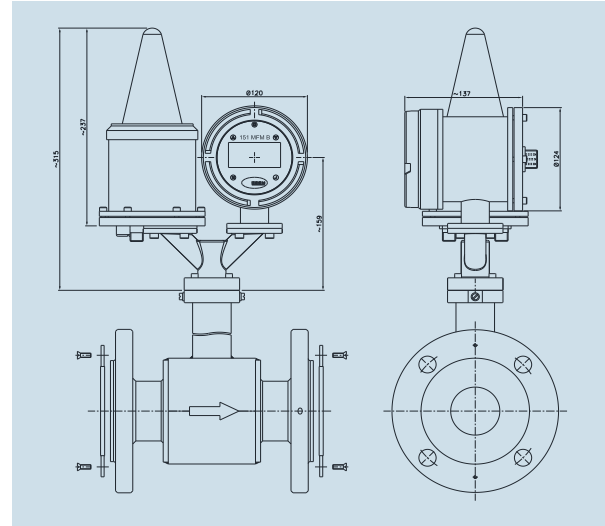

Converter & Data Logger Mounting Inside Panel With Battery Backup

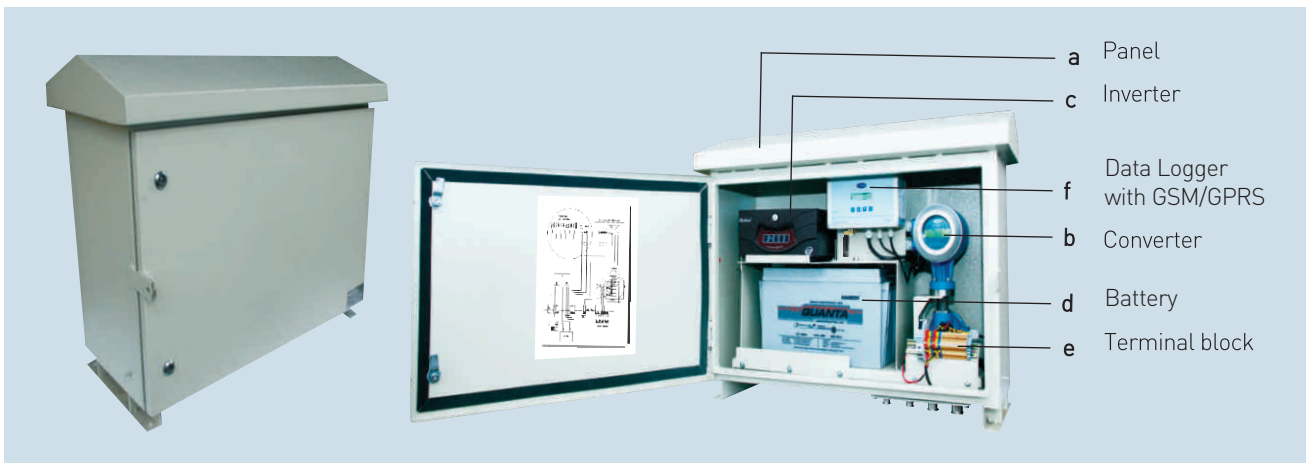

Accuracy

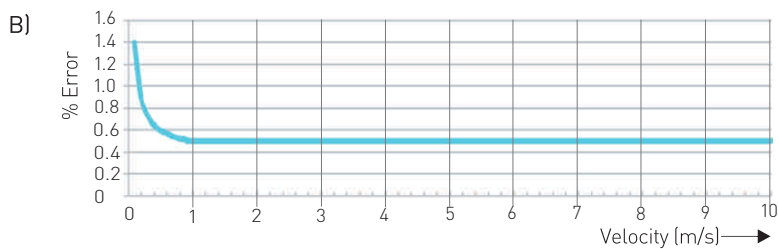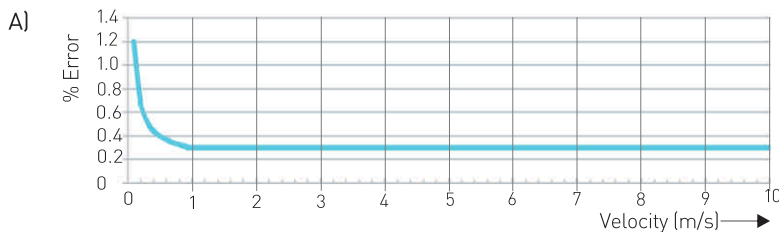

Curve	Velocity $\geq 1\text{m/s}$	Velocity $< 1\text{m/s}$
A	$\pm 0.3\%$	$\pm 0.2\%$ $\pm 1\text{mm/s}$
B	$\pm 0.5\%$	$\pm 0.4\%$ $\pm 1\text{mm/s}$

At constant flow.

* Under reference conditions

Specifications for 151MFM- W

Nominal internal diameter DN (mm)	15 to 3000
Working pressure	6 Kg/cm ² or 10 Kg/cm ² or 16 Kg/cm ²
Ambient Temperature	-10 ⁰ C to 60 ⁰ C Or -10 ⁰ C to 80 ⁰ C
Electrode Material	Std. - Stainless Steel SS 316; Optional - SS 316L, Hastelloy C, Titanium or Tantalum
Conductivity of measured liquid	≥ 20μS/cm
Sensor lining	Rubber/ Teflon (PTFE)/ Hard Rubber /Neoprene / Polyurethane
Display version	Integral or Remotely mounted
Measuring Tube Material	Std. - SS 304 ; Optional - SS 316
Sensor Housing Material	Std. - CS ; Optional - SS 304/ SS 316
End Connection	Flanged (ANSI/DIN/AWWA) or Wafer
Measuring Range	Upto 15 m/s
Accuracy	± 0.5 % of flow *
Repeatability	± 0.1 %
Display	Liquid Crystal Display, Two Line, Backlit 16 characters per line, 5 digit - Instantaneous flow & 9 digit - Total flow
Displayed units	Totalised flow : m ³ ,L Instantaneous flow : m ³ /hr, m ³ /min, m ³ /sec, L/hr, L/min, L/sec
Outputs	Std.- Current 4 to 20 mA, Frequency (0 to 5000 Hz) / Pulse (0.001 to 1 m ³) Optional - RS 232(MODBUS RTU) / RS 485 (MODBUS RTU)/ HART /
Power Supply	Std.- 85 to 265 VAC,45 to 65 Hz or Optional - 24 VDC
Protection Class	Sensor : Weather Proof - IP 67 - Standard , IP 68 - Optional for Remote version Converter/ Transmitter : IP 67
Cable Length (For Remote version)	10 m (Std.) / Additional metres on request. Maximum cable length up to 300 m.**

* Under reference conditions ** For cable length higher than 300mtrs., Consult H.O.

Sensor Size (mm), FLOW@ 3 m/s

Sensor Size (mm)	25	32	40	50	65	80	100	125	150	200	250	300	350	400
Flow @ 3 m/s (m ³ /h)	5	9	14	21	36	54	85	133	191	340	530	764	1040	1357

Sensor Size (mm)	450	500	600	700	800	900	1000
Flow @ 3 m/s (m ³ /h)	1717	2120	3053	4156	5428	6870	8481

Sensor Size (mm)	1200	1400	1600	1800	2000
Flow @ 3 m/s (m ³ /h)	12213	16623	21711	27478	33924

Specifications for 151MFM- E

Nominal internal diameter DN (mm)	15 to 3000
Working pressure	6 Kg/cm ² or 10 Kg/cm ² or 16 Kg/cm ²
Ambient Temperature	-10 ⁰ C to 60 ⁰ C Or -10 ⁰ C to 80 ⁰ C
Electrode Material	Std.- Stainless Steel SS 316; Optional - SS 316L, Hastelloy C, Titanium or Tantalum
Conductivity of measured liquid	≥ 20μS/cm
Sensor lining	Rubber/ Teflon (PTFE)/ Hard Rubber /Neoprene / Polyurethane
Display version	Integral or Remotely mounted
Measuring Tube Material	Std. - SS 304 ; Optional - SS 316
Sensor Housing Material	Std. - CS ; Optional - SS 304/ SS 316
End Connection	Flanged (ANSI/DIN/AWWA) or Wafer
Measuring Range	Upto 15 m/s
Accuracy	± 0.3 % of flow *
Repeatability	± 0.1 %
Display	Liquid Crystal Display, Two Line, Backlit 16 characters per line 5 digit - Instantaneous flow & 9 digit - Total flow
Displayed units	Totalised flow : m ³ ,L Instantaneous flow : m ³ /hr, m ³ /min, m ³ /sec, L/hr, L/min, L/sec
Outputs	Std.- Current 4 to 20 mA, Frequency (0 to 5000 Hz) / Pulse (0.001 to 1 m ³) Optional - RS 232(MODBUS RTU) / RS 485 (MODBUS RTU)/ HART /
Power Supply	Std.- 85 to 265 VAC,45 to 65 Hz or Optional - 24 VDC
Protection Class	Sensor : Weather Proof - IP 67 - Standard , IP 68 - Optional for Remote version Converter/ Transmitter : IP 67
Cable Length (For Remote version)	10 m (Std.) / Additional metres on request. Maximum cable length up to 300 m.**

* Under reference conditions ** For cable length higher than 300mtrs., Consult H.O.

Ordering Code

151 MFM - E 2 0 N

<p>Accuracy Class & Display E: ± 0.3% of measured flow, 2 line LCD</p> <p>Indicator-Converter type I: Integral R: Remote, field mounted</p> <p>Power Supply 1: 24 VDC 4: Universal Power supply 85 to 265VAC@45 to 65 Hz</p> <p>Output 2: 4 to 20 mA</p> <p>Communication Interface 0 - Not Applicable 1 - RS 232 (MODBUS RTU) 2 - RS 485 (MODBUS RTU) 3 - HART</p> <p>Data Logger 0: Not applicable</p> <p>Cable Entry G: PG 13.5 N: ½"NPT</p>	<p>Sensor Size 0015 - 15 mm (1/2") 0025 - 25 mm (1") 0032 - 32 mm (1 1/4") 0040 - 40 mm (1 1/2") 0050 - 50 mm (2") 0065 - 65 mm (2 1/2") 0080 - 80 mm (3") 0100 - 100 mm (4") 0125 - 125 mm (5") 0150 - 150 mm (6") 0200 - 200 mm (8") 0250 - 250 mm (10") 0300 - 300 mm (12") 0350 - 350mm(14") 0400 - 400mm(16") 0450 - 450 mm (18") 0500 - 500 mm (20") 0600 - 600 mm (24") 0700 - 700 mm (28") 0800 - 800 mm (32") 0900 - 900 mm (36") 1000 - 1000 mm (39") 1200 - 1200 mm (47") 1400 - 1400 mm (55") 1600 - 1600 mm(63") 1800 - 1800 mm(71") 2000 - 2000 mm(79") 2200 - 2200 mm(87") 2400 - 2400 mm(94") 2600 - 2600 mm(102") 2800 - 2800 mm(110") 3000 - 3000 mm(118") See Note 3***</p>	<p>Approval P - Non-hazardous area S - Flameproof</p> <p>Protection Class for Sensor 7: IP 67 8: IP 68</p> <p>Coil Housing 2 : CS 4 : SS 304 6 : SS 316 9: Others **</p> <p>Measuring Tube 4 : SS 304 6 : SS 316 9: Others **</p> <p>Earth Rings 1 : None. With built-in earthing electrode See Note 4**** 4 : SS 304 6 : SS 316 7 : SS 316L 9: Others **</p> <p>Electrode material 3: Titanium 5: Tantalum 6: SS 316 7: SS 316L 8: Hastelloy C 9: Others **</p>	
<p>Pressure Rating (Kg/cm²) 1: 6 Kg/cm² 2: 10 Kg/cm² 3: 16 Kg/cm² 9: Others **</p>	<p>Design of the measuring sensor W: Wafer D: Flanged-DIN A: Flanged ANSI S: Flanged AWWA 9: Others **</p>	<p>Flange Material 0: Not Applicable 1: CS 4: SS304 6: SS316 9: Others **</p>	<p>Sensor Lining 1: Rubber 2: Teflon (PTFE) 3: Hard Rubber 4: Neoprene 5: Polyurethane 9: Others **</p>

Notes:

1. * Flameproof version available for Sensor sizes up-to 400mm
2. ** Other material/ options on request, please refer to H. O.
3. *** Other line sizes available on request, please refer to H. O.
4. **** Built-in earthing electrode is available for sensor sizes 40 mm and above. Up to 32 mm, earthing rings are compulsory.
5. ***** In corrosive application if selected Hastelloy C, Titanium & Tantalum sensing electrode, then earthing electrode / earthing ring should be of same material
6. ***** In case of non-metallic pipeline earthing rings are compulsory.

Specifications for 151MFM- P

Nominal internal Diameter DN (mm)	15 to 3000
Working Pressure	6 Kg/cm ² or 10 Kg/cm ² or 16 Kg/cm ²
Ambient Temperature	-10 ⁰ C to 60 ⁰ C Or -10 ⁰ C to 80 ⁰ C
Electrode Material	Std.- Stainless Steel SS 316; Optional - SS 316L, Hastelloy C, Titanium or Tantalum
Conductivity of measured liquid	≥ 20μS/cm
Sensor lining	Rubber/ Teflon (PTFE)/ Hard Rubber /Neoprene / Polyurethane
Display version	Integral or Remotely mounted
Measuring Tube Material	Std. - SS 304 ; Optional - SS 316
Sensor Housing Material	Std. - CS ; Optional - SS 304/ SS 316
End Connection	Flanged (ANSI/DIN/AWWA) or Wafer
Measuring Range	Upto 15 m/s
Accuracy	± 0.3 % of flow *
Repeatability	± 0.1%
Display	Graphical backlit LCD, 3 line 5 digit - Instantaneous flow & 9 digit - Total flow
Displayed units	Totalised flow : m ³ ,L Instantaneous flow : m ³ /hr, m ³ /min, m ³ /sec, L/hr, L/min, L/sec
Outputs	Std.- Current 4 to 20 mA, Frequency (0 to 5000 Hz) / Pulse (0.001 to 1 m ³) Optional - RS 232(MODBUS RTU) / RS 485 (MODBUS RTU)/ HART / Optional - Data Logger
Power Supply	Std.- 85 to 265 VAC,45 to 65 Hz or Optional - 24 VDC
Protection Class	Sensor : Weather Proof - IP 67 - Standard , IP 68 - Optional for Remote version Converter/ Transmitter : IP 67
Cable Length (For Remote version)	10 m (Std.) / Additional metres on request. Maximum cable length up to 300 m.**

* Under reference conditions ** For cable length higher than 300mtrs., Consult H.O.

Battery Operated Electromagnetic Flow Meter

Specifications for 151MFM-B

Nominal Internal Diameter DN (mm)	15 to 1000
Working Pressure	6 Kg/cm ² or 10 Kg/cm ² or 16 Kg/cm ²
Ambient Temperature	-10 ⁰ C to 60 ⁰ C Or -10 ⁰ C to 80 ⁰ C
Electrode Material	SS 316/SS 316L/Hastealloy C /Titanium
Conductivity of measured liquid	≥ 50μS/cm
Sensor lining	Rubber/ Teflon (PTFE)/ Hard Rubber /Neoprene / Polyurethane
Display Version	Integral or Remote (Cable Length Max. 10m)
Measuring Tube Material	SS 304, SS 316
Sensor Housing Material	Std. - CS ; Optional - SS 304, SS 316
End Connection	ANSI/DIN/AWWA
Measuring Range	Upto 15 m/s
Accuracy	± 0.5 % of flow *
Repeatability	± 0.1%
Display	Graphical LCD
Alarm Indication	Sensor Fault (Excitation Open Circuit), Reverse Flow, High / Low Flow, Low Battery, Empty Pipe
Optional Input (For Pressure Measurement)	From SBEM make Pressure Transducer (SS304, IP68,1" BSP Male Threading,5 m cable) Pressure Range-0-4.6,10,20or 24 bar (Absolute) Accuracuy : <=+/- 0.5% of Span
Outputs	Opto-mos Relay Pulse output, 50 Hz maximum.
Power Supply	3.6 V Battery Pack
Protection Class	Sensor-W/P IP 67-Standard, IP 68-Optional For Remote Sensor Convertor / Transmitter-IP67
Communication Interface	RS 485 (Optional) / GSM/GPRS (Optional)
Displayed units	Totalised flow : m ³ ,L Instantaneous flow : m ³ /hr, m ³ /min, m ³ /sec, L/hr, L/min, L/sec

* Under reference conditions

Ordering Code

151 MFM - **B** **5** **1** **N**

<p>Accuracy Class & Display</p> <p>B : Battery operated ± 0.5% of measured value; Graphic LCD</p> <p>Indicator-Converter type</p> <p>I - Integral R - Remote, field mounted</p> <p>Power Supply</p> <p>5 - Internal Battery</p> <p>Output</p> <p>1 - Open Collector Pulse Output</p> <p>Communication Interface</p> <p>0 - Not Applicable 2 - RS 485 4 - GSM/GPRS</p> <p>Data Logger</p> <p>0 - Not required 1 - Yes</p> <p>Pressure Input</p> <p>0 - Not Required 1 - Required</p>	<p>Sensor Size</p> <p>0015 - 15 mm (1/2") 0025 - 25 mm (1") 0032 - 32 mm (1 1/4") 0040 - 40 mm (1 1/2") 0050 - 50 mm (2") 0065 - 65 mm (2 1/2") 0080 - 80 mm (3") 0100 - 100 mm (4") 0125 - 125 mm (5") 0150 - 150 mm (6") 0200 - 200 mm (8") 0250 - 250 mm (10") 0300 - 300 mm (12") 0350 - 350mm(14") 0400 - 400mm(16") 0450 - 450 mm (18") 0500 - 500 mm (20") 0600 - 600 mm (24") 0700 - 700 mm (28") 0800 - 800 mm (32") 0900 - 0900 mm(36") 1000 - 1000 mm(39") See Note 2***</p>	<p>Approval</p> <p>P - Non-hazardous area</p> <p>Protection Class</p> <p>7: IP 67 Sensor 8: IP 68 Sensor</p> <p>Coil Housing</p> <p>2 : CS 4 : SS 304 6 : SS 316 9: Others *</p> <p>Measuring Tube</p> <p>4 : SS 304 6 : SS 316 9: Others *</p> <p>Earth Rings</p> <p>1 : None. With built-in earthing electrode See Note 3*** 4 : SS 304 6 : SS 316 7 : SS 316L 9: Others *</p> <p>Electrode material</p> <p>3: Titanium 5: Tantalum 6: SS 316 7: SS 316L 8: Hastelloy C 9: Others *</p>	
<p>Pressure Rating (Kg/cm²)</p> <p>1: 6 Kg/cm² 2: 10 Kg/cm² 3: 16 Kg/cm² 9: Others *</p>	<p>Design of the measuring sensor</p> <p>D: Flanged-DIN A: Flanged ANSI S: Flanged AWWA 9: Others *</p>	<p>Flange Material</p> <p>0-Not Applicable 1-CS 4-SS304 6-SS316 9: Others *</p>	<p>Sensor Lining</p> <p>1: Rubber 2: Teflon (PTFE) 3: Hard Rubber 4: Neoprene 5: Polyurethane 9: Others *</p>

Notes:

1. * Flame proof version available for sensors upto 400 mm.
- 2.** Other material/ options on request, please refer to H. O.
- 3.*** Other line sizes available on request, please refer to H. O.
- 4.**** Built-in earthing electrode is available for sensor sizes 40 mm and above. Up to 32 mm, earthing rings are compulsory.
- 5.***** When Data Logger is selected, communication interface will be Rs232
- 6.***** In corrosive application if selected Hastelloy C, Titanium & Tantalum sensing electrode, then earthing electrode / earthing ring should be of same material
- 7.***** In case of non-metallic pipeline earthing rings are compulsory.

Water Balancing SCADA (WBS)




SBEM's Water Monitoring / Balancing System is used in large industrial setups (Power, Cement, Chemical etc.) for reliable online monitoring of water withdrawals from Water Sources, Consumptions & thereby calculating losses. Real time / totalized flow data is read from SBEM flow meters by SBEM M2M (Machine to Machine interface) & sent to centralized Water Balancing System SCADA by using GPRS Communication. The collected data is represented to the user in the form of various Screens & Reports for intensify Water usage / loss trends.

Product Features

- Real time monitoring of instantaneous flow rate & cumulative flow.
- Reliable Measurement & wireless data transfer considering remote locations.
- Seamless integration with SCADA using standard MODBUS TCP or SBEM proprietary protocol (ASCII).
- TCP/IP or UDP Transport Layer. Displays the Flow rate trends & reports of the field devices with selectable Date / Time ranges.
- Historical data of Individual Cluster with multiple Flow Meters for measuring the Withdrawals/Consumptions.
- Separate Consumptions are provided for Industrial / Domestic Purpose.
- New Stages, Clusters, devices can be added as per user requirement.
- Multi Location monitoring to view data / reports simultaneously.
- Other process instruments (level, pressure etc.) can be integrated with the system.
- Provision for virtual flow meters
- Daily / Weekly / Monthly Consumption
- Expandability in System.
- Export Data to Excel
- Customized Reports

Applications

Water and Waste water Management (WTP).
Effluent Treatment Plant (ETP).
Public Health Engineering (PHE).
Elevated Storage Reservoirs & Distributed
Pipeline Monitoring

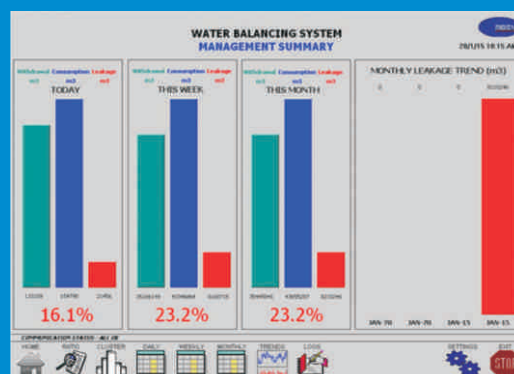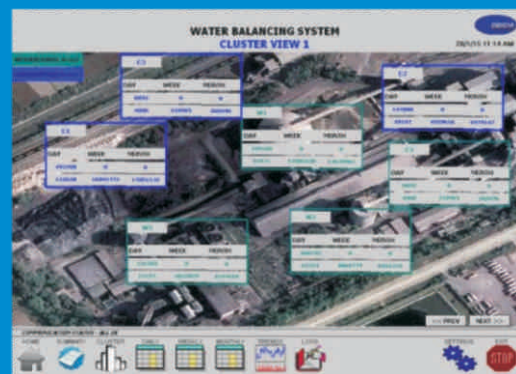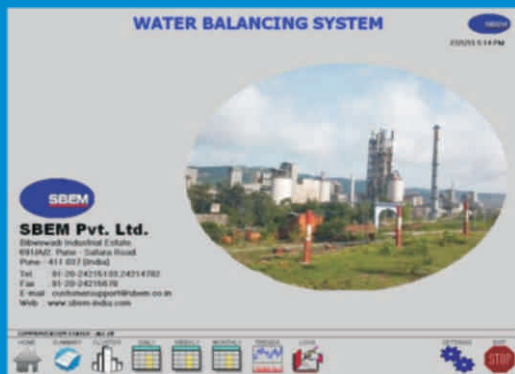


Machine to Machine Interface [M2M]


Specifications for 200 – M2M

PARAMETERS	SPECIFICATIONS
Network Support	2G/3G/4G / LTE
Operating Voltage	12 VDC to 26 VDC
Current consumption	40 mA @ 12 V standby & 100mA @ 12 V peak
Operating temperature	-20° C to 85° C
Input port (ADI 1 & ADI 2)	2 channel (0 to 24 V) analog / Digital input
Analog port (AI)	1 channel 4 to 20mA DC
Protocols	GSM (SMS) and/or GPRS. Data formats: .csv ,json etc.
RS 485 (std. modbus)	8 modbus and slave device
Memory (no. of records)	17000
Serial Port	USB port for device configuration on PC utility.
Serial Interface	Rs232 or RS485
Baud Rate	2400, 4800, 9600, 19200, 38400, 57600, 115200 bps

Ordering Code

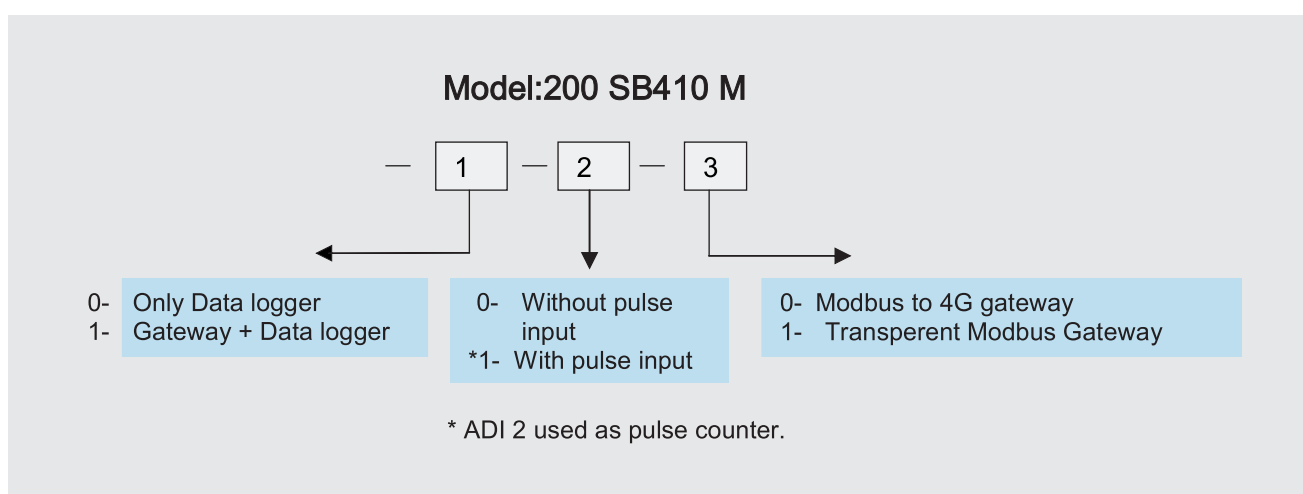

GSM/ GPRS connectivity

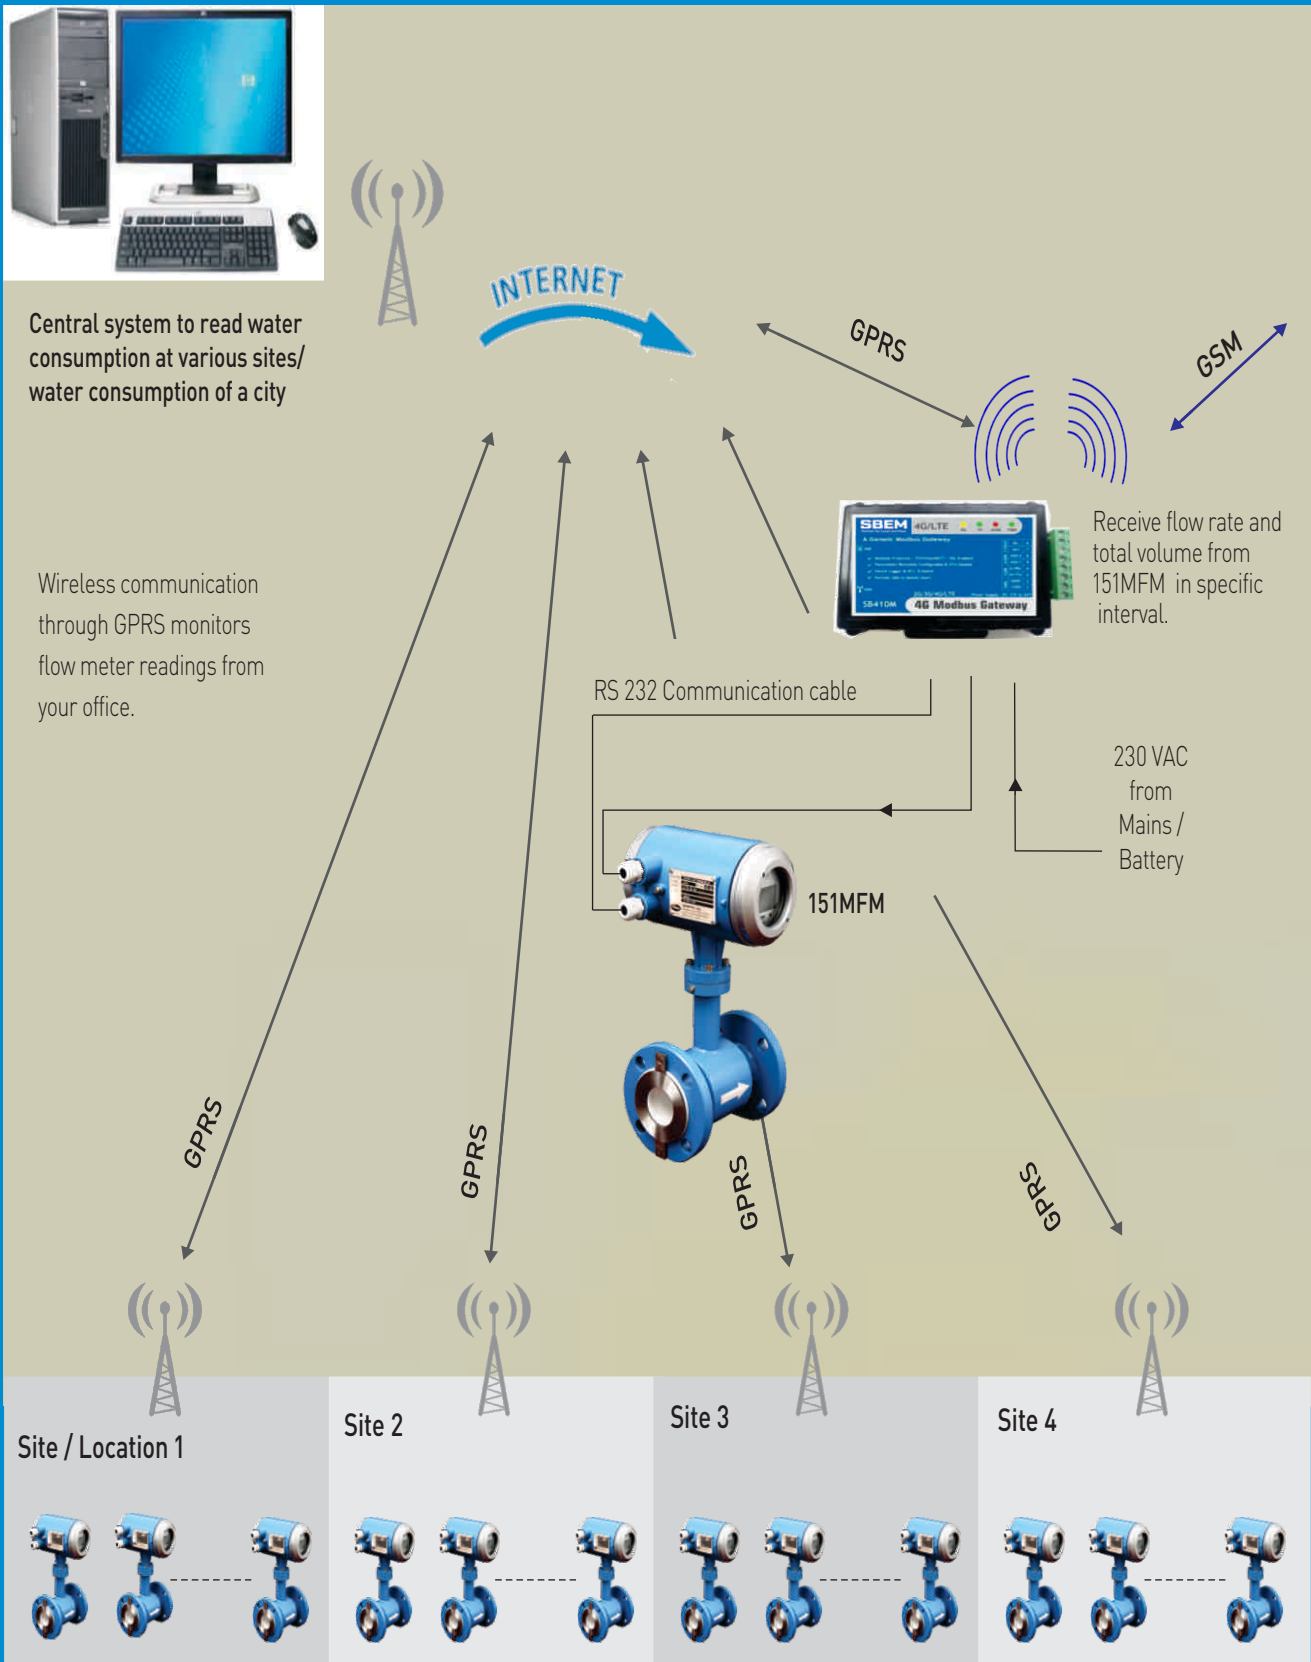


Installation Guidelines

The meter performance will be the best if the liquid flow in the piping is well stabilized; therefore it is necessary to observe specific rules for the sensor placement in piping. In the contact planes between the sensor and the adjoining piping sections should be no edges as these would cause flow turbulence. Make sure that straight piping sections are provided before and after the sensor; their required length is proportional to the inner diameter of the piping concerned.


If more than one flow-disturbing elements such as pipe bend or fitting are located near the sensor, the required length of straight piping section on the sensor side should be multiplied by the quantity of such Elements.

Inner diameter of the connected pipeline must not be smaller than and should not be bigger than inner diameter of sensor.


In the case of bi-directional flow, the same principles are valid before and after flow meter's body.

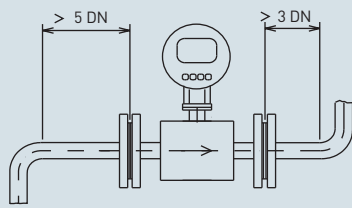

Required straight piping sections

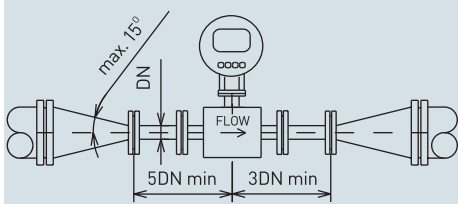


Pipe narrowing

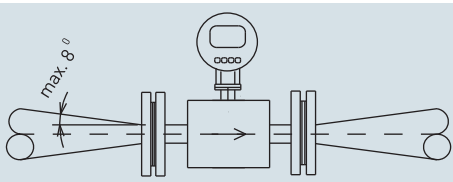


In the case where the pipeline nominal size is bigger than nominal size of flow meter, it is necessary to use conical reduction with the maximum slope 15° . In the case of bi-directional flow, conical reduction must be installed on both sides, both with minimum straight piping 5 DN.

Pipe narrowing sections with angles not exceeding 8° can be taken for straight sections.

In the cases where the liquid is pumped, the flow sensor shall always be placed at the output side of the pump to prevent underpressure in the piping which might damage the sensor.

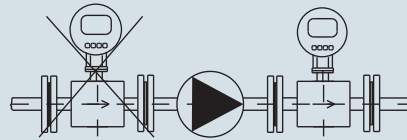


Pump in the piping

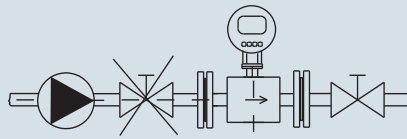

Closing valve in the piping

For the same reason, the sensor shall be always placed before the closing valve in the piping.


The sensor can be fitted in the piping in either horizontal or vertical position. However, make sure that the electrode axis is always horizontal and, if the sensor is mounted in a Horizontal position, the flange section.



Must Do


- Measuring tube must be fully filled at all times
- Earthing Ring/Electrodes must be installed
- No exposure to direct sunlight, canopy is recommended.

Installation Guidelines

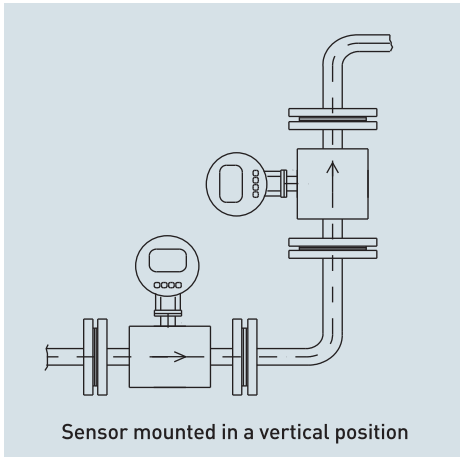


In the cases where the sensor is mounted in a vertical position, the flow direction shall always be upwards.


To ensure correct meter function at all times, the measured liquid shall completely fill up the sensor and no air bubbles shall be permitted to

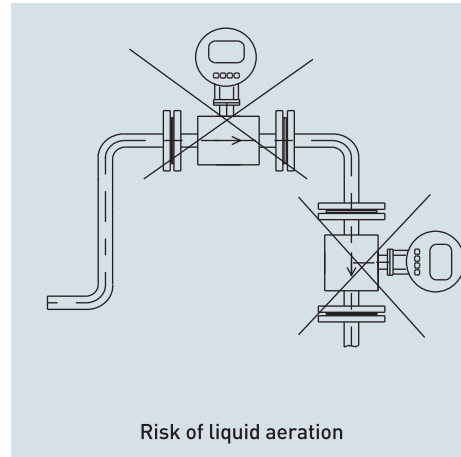


accumulate or develop in the sensor tube. Therefore the sensor shall never be placed in the upper Pocket of the piping or in a vertical piping section where the flow direction is downwards.

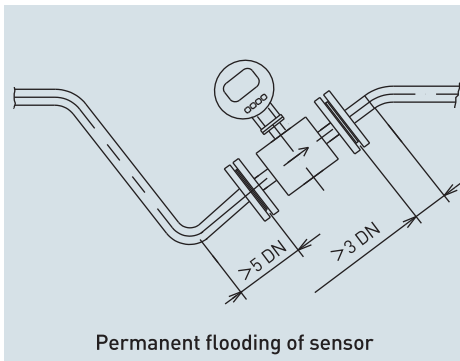

In piping systems where complete flooding of the piping cannot always be guaranteed, consider placing the sensor in a bottom pocket where full flooding is sure.

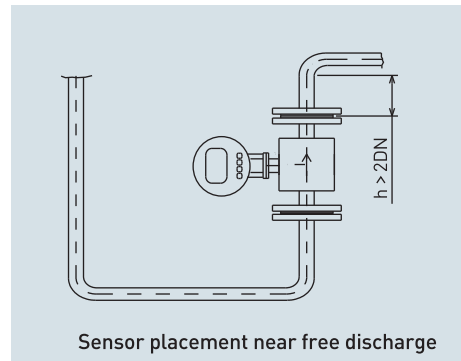


If the sensor is located near a free discharge point, such point shall be by at least 2 DN higher than the top part of the sensor.

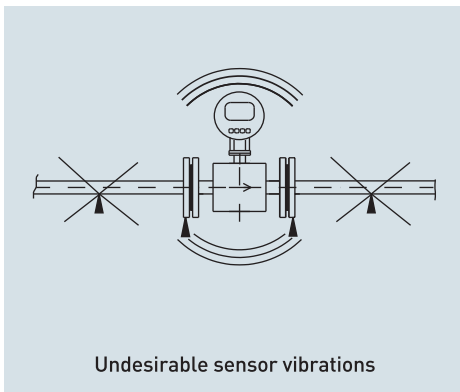

Make sure that the adjoining piping is clamped/supported as close to the sensor as possible, to prevent vibrations and damage to the sensor.

In applications where continuous liquid flow is essential, a bypass shall be provided to allow

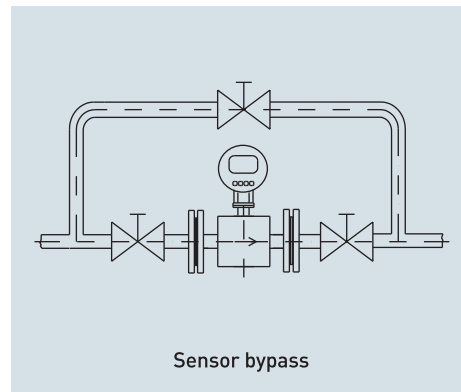

for sensor servicing. A Sensor bypass may be a also reasonable solution in the cases where, to dismantle the flow sensor from the piping, Liquid from a very long piping section would have to be discharged.

Customer Appreciation- Our Success Stories

Our biggest motivation is customer satisfaction. Words of appreciation from our customers not only make us happy, but drive us

for further innovation and better service. A token of appreciation from our customers- our hard earned reward.

KARNATAKA URBAN WATER SUPPLY AND DRAINAGE BOARD KALABURGI DIVISION, KALABURGI.
 No. KWB/EEG/TEC/AE-2/SDM/2018-19/ 2.5.2.2. dated: 2.9.12-2-C)S

PERFORMANCE CERTIFICATE

To,
 M/s Sheth and Sura Engineers Pvt.Ltd.,
 PUNE

Ref: AEE/KUWSDDB No.2 Sub-Div. Letter No.613 Dt-29/12/2018
 Ref: M/s. Sheth and Sura Engineers Pvt.Ltd Pune
 Letter No.SSEPL/Sdadm/18-19/0131 dated 29-12-2018

This is to certify that M/s. Sheth and Sura Engineers Pvt.Ltd, have supplied, erected, commissioned, procured M/s SBEM Make Battery Operated Electromagnetic flow meters of following sizes for the tender work of Providing 24x7 WSS in Zone 1,2,3 & 4 including house service connections to Sedam town under UISSMT

Sl.No.	Description of Flowmeter	Quantity
1)	100mm dia.	03 Nos.
2)	150mm dia.	05 Nos.
3)	200mm dia.	03 Nos.
4)	250mm dia.	01 No.
5)	300mm dia.	01 No.

The materials are supplied the year 2017 and are functioning efficiently and satisfactorily since 2017.
 This certificate is issued on the request of M/s. Sheth & Sura Engineers Pvt.Ltd.,Pune.

Executive Engineer,
 KUWS & D Board, Division,
 Kalaburgi

Copy to:- M/s SBEM Pvt Ltd,
 Unit No.39,Electronic CO-operative estate,
 Pune-Satara Road
 PUNE-411009

KSK Water Infrastructures Private Limited

July 18, 2014

TO WHOM SO EVER IT MAY CONCERN

We hereby confirm that we have procured Electromagnetic Flow Meters from SBEM Pune, for our 6 X 600MW RSK Maharashtra Power Company Limited executed through an SPV, RSK Water Infrastructures Pvt. Ltd, In Chattargh. These Flow meters of various sizes from 100mm to 1800 mm were in scope of our EPC, Zuber) Engineering Company vide their Purchase Order no. ZEC/2013/AS/RW/17-14/SUPPLY/2013/1490 placed on SBEM.

Some of these Flow Meters have been installed, the performance of Flow Meters & services provided by SBEM are satisfactory till date.

This Certificate is being issued on request of SBEM, however does not absolve SBEM from any contractual responsibility.

Authorized Signatory
 For KSK Water Infrastructures Pvt. Ltd.

Sheth & Sura ENGINEERS PVT LTD
 'Aqua House' 263/1, Srinagad Road,
 Near Parvat Over Bridge, Pune - 411030
 Phone : + 91 20 24333890
 E-mail : hoshethsura@gmail.com

19 September 2022

TO WHOMSOEVER IT MAY CONCERN

We hereby confirm that we have procured Electromagnetic flow meter from SBEM Pvt. Ltd. Pune for our Government water supply project "Karnataka Integrated Urban Water Management and Investment Programme (KIUWMP): Slice No.1 - Imp. of Water Supply system (Bulk) in Harihara City, Contract Package No. O1HRAO2. There are 16 nos. flow meters are supplied against our purchase order no. SSEPL/ KUWSDDB -Harihara/Jul.158 Dated: 10/July/ 2018.

These flow meters are already installed & working properly since more than three years. The performance & services provided by SBEM found satisfactory till date.

This certificate is being issued on request of SBEM, however it does not absolve SBEM from any contractual responsibility.

For Sheth & Sura Engineers Pvt. Ltd.

Name : *Suresh*
 Designation : Director

LAXMI CIVIL ENGINEERING SERVICES PVT. LTD.
 CIVIL, MECHANICAL, ELECTRICAL ENGINEERS AND CONTRACTORS

Our Ref: LE/SBEM/159/2016 Date: 10/02/2016

To,
 SBEM PVT.LTD.,
 39, Electronic Co-op. Estate,
 Pune-Satara Road,
 PUNE - 411009
 Ph: No : 91 20 24333890
 Fax No : 91 20 24333890
 Email : www.sbeempvt.com

TO WHOMSOEVER IT MAY CONCERN

We hereby confirm that we have procured Electromagnetic Flow meters from SBEM Pvt. Ltd., Pune for our Government water supply project, Project name, under JALSHAKTI scheme in Himnanchal Pradesh. These Flow meters are of various sizes from 100 mm to 500 mm & are supplied against our purchase order no. LE/S-ICPAL/IMP/FORM/0102/2012 13 Dated: 31/03/2012 & LE/SHPAL/IMP/FORM/0102/14 Dated: 16/12/2014.

Total 129 flow meters are supplied & commissioned till date. The performance of flow meters & services provided by SBEM to found satisfactory.

For Laxmi Civil Engineering Services Pvt. Ltd.

Mr. Shrikanth Rajendra Doshi
 Director

ArMation Electric
 Adding Values With Technology

+91-62301-62001, 78140-08888
 info@armationelectric.com
 www.armationelectric.com

Date: 04/02/2023

TO WHOMSOEVER IT MAY CONCERN

We hereby confirm that we have procured Electromagnetic flow meters from SBEM PVT. LTD. PUNE for our Government Projects under JALSHAKTI VIBHAG Himnanchal Pradesh. There are 14 nos. Electromagnetic flow meters Model 151MFV from line size 65 mm to 250 mm and 10 Nos. Ultrasonic Level Transmitters Model 136ULT. These items are supplied against our purchase order no: AEP/PO/036/2021-22dt 22/09/2021.

These flow meters and level transmitters are already installed & working properly since more than Two years. The performance & services provided by SBEM found satisfactory till date.

This certificate is being issued on request of SBEM, however it does not absolve SBEM from any contractual responsibility.

For ARMATION ELECTRIC PRIVATE LIMITED

Name: *Saurabh Vasudeva*
 Contact No. 7814008888

Head Office: Plot No. 224, Industrial Area Sector 2, Faridkot, District Ludhiana, Punjab (141001)
 Branch Office: Plot No. 247, Industrial Area Sector 2, Faridkot, District Ludhiana (141001)
 Service Center: Village Anbala, Post Office Anbala, Tehsil Patilwala, District Ludhiana (P.F. 150001)

Himnanchal Pradesh
 Jal Shakti Vibhag
 No. EES/2021-22dt Work Order: 0023. 7/2/21 Date: 12-9-2023

To:
 ArMation Electric Pvt Ltd,
 Ludhiana, P.F.

Subject:- Product performance and satisfaction about SBEM make flow meters and Ultrasonic Level Transmitters integrated and commissioned by ArMation Electric Pvt. Ltd. through Contractor "Lahoty Builders Limited" in the scheme "Rejuvenation of LWSB Sundernagar".

This letter is regarding the satisfactory response of the SBEM make flow meters and Ultrasonic Level Transmitters in the work i.e. "Rejuvenation of LWSB Sundernagar", and the department is satisfied with the Flowmeters and ultrasonic level transmitters by SBEM used in the scheme that has been running successfully for the past 2 years.

The undermentioned Flowmeters and Ultrasonic Level Transmitters (SBEM make) were used under the scheme "Rejuvenation of LWSB Sundernagar" by the AEP/ (ArMation Electric Pvt. Ltd.) through M/S Lahoty Builders Limited from Ludhiana, Punjab.

S.No.	PRODUCT	DIAMETER	QUANTITY	MAKE
1	FLOWMETER	350 mm	1	SBEM
2	FLOWMETER	250mm	2	SBEM
3	FLOWMETER	200mm	2	SBEM
4	FLOWMETER	150mm	3	SBEM
5	FLOWMETER	125mm	3	SBEM
6	FLOWMETER	80mm	1	SBEM
7	FLOWMETER	67mm	1	SBEM
8	ULT	6m	1	SBEM
9	ULT	12m	1	SBEM
TOTAL				14

Executive Engineer,
 Jal Shakti Division,
 Sunder Nagar

Our Clients Portfolio

Ingenious solutions from Indigenous source

Our products are used across multiple industries and clients. From raw water to sewage and treated water, SBEM has an extensive presence in the market. Illustrations are given below:

Water & Waste Water	Larsen & Toubro	NCC Ltd.	Vishwaraj Infrastructure	The Indian Hume Pipe	JMC Projects (I) Ltd.	Cimcon Software
Cement & Steel	Ambuja	India Cements	Aditya Birla	SAIL	Tata Steel	JSW
Power	BHEL	NTPC	Reliance	MAHAGENCO	ESSAR	Adani
	LANCO	Jindal Power	India Bulls	Tata Power	Coastal Energen	DVC
Oil, Refineries & Gas	IOCL	BPCL	HPCL	ONGC	NAYARA	EMERSON
	Indian Strategic Petroleum Reserves Limited		ONGC Petroleum Additions Limited		IOT Infrastructure & Energy Services Ltd	
Chemical, Sugar & Food	Deepak Nitrite Limited	Shree Renuka Sugars Ltd.	MECTECH	Cargill	Desmet ballestra	Ruchi Soya
Consultants	EIL	WAPCOS	TCE	Mecon	DCPL	STC
	PDIL	Jacobs	M.N.Dastur	Toyo Engg.	Uhde India	
Indian Navy & Marine	Mazagaon Dock Limited (MDL)	Ship Building Centre (SBC)	Defence Machinery Design Establishment (DMDE)		INS Sindhu dhvaj	INS Sindhukesari

Your Applications & Our Solutions

Public Health Engineering

Application	SBEM Solution
Gravity Filter beds	Loss of Head Level Indicator - Transmitters,
Sumps at Water Treatment	Ultrasonic Level Transmitters, 136 ULT
ESR at various Locations	Ultrasonic Level Transmitters, 136 ULT
Raw water intake, Distribution channels And Tube Wells	Flow Meters, 151 MFM, 153 UFM, Electromagnetic Flow Meters, 151 MFM
Sewage Treatment Plants	Open Channel Flow Meters, 136 ULT

Water & Waste Water Treatment / Distribution

Application	SBEM Solution
Raw Water Intake	Electromagnetic Flowmeter 151 MFM Ultrasonic Flow Meter 153 UFM Residential Water Meter 153 RWM
Coagulation	pH, Turbidity TURL, Conductivity Controller
Chlorine Injection	Free Chlorine, pH
Effluent Treatment Plant	pH, Conductivity Controller
Aeration Basin	Disolved Oxygen DOT, pH, Conductivity Controller
Secondary Clarifier	pH, Conductivity Controller
Swimming Pool and Spa	Free Chlorine, pH

Steel Industry And Iron Ore

Application	SBEM Solution
Gas Holder	Float & Tape Level Gauge with Two Wire Transmitter, 133 ATLG +TWT
Iron Ore/ Direct Reduced Iron (DRI)	Ultrasonic Level Transmitter, 136 ULT, Pulse Radar, 138
Back Filter Hopper	Capacitance Type Level Switch, 114MLS
LPG Tanks	Servo Gauge, 139 M
Fuel Oil Tanks	Float & Tape Level Gauge with Two Wire Transmitter, 133 ATLG +TWT

Thermal Power

Application	SBEM Solution
Coal Bunkers	Pulse Radar, 138
Travelling Water Screens	Hydrostatic Pressure Transmitters, 103 HPT, Ultrasonic Transmitters, 136 ULT
Gravity Filter beds	Loss of Head Level Indicator - Transmitters, 104 LOH
Flow Measurement	Electromagnetic Flow Meters, 151 MFM
Various Tanks	Float, Displacer, Conductivity, Capacitance Type level
Ash Slurry	Ultrasonic Level Transmitters, 136 ULT, Pulse Radar,
Ash Hoppers	RF Admittance Type Level switches, 114 RFS

Oil, Gas & Refineries

Application	SBEM Solution
Cone Roof and Floating Roof Tank Mounded Vessels / Spheres	Float Operated Microprocessor based Level Transmitter & Indicator 133/STDT/CIU/SBTFMS Servo Operated Microprocessor based Level Transmitter & Indicator 139M/ TSIC /CIU
Mounded Vessels and Underground Bullets in Auto LPG Stations	Displacer Level Switch 137 Magnetostrictive Level Transmitter & Indicator, 134 DLi / 134 H / 134 S / 176
CAVERNS	Servo Operated Microprocessor based Level Transmitter & Indicator 139/ TSIC /CIU/SBTFMS

Cement Industry

Application	SBEM Solution
Coal Bunkers	Pulse Radar, 138; Paddle Type Level Switch, 135 LC
VRM Feed Belt Disc / VRM Lime Stone	
Coal Mill	Capacitance Level Switch, 114 MLS, Paddle Type Level Switch, 135 LC
Kiln & Cooler ESP	
Bauxite Storage	
Limestone Storage	
Fly Ash ESP Hoppers	Pulse Radar, 138
Cement Bins	
CM CLR Hoppers	Pulse Radar, 138, Paddle Type Level Switch, 135 LC
Lime Stone, Iron Ore, Bauxite, Lignite,	
Silo HLA	
Kiln Feed Bin	151 MFM / 153 UFM + SCADA
Water Balancing System	

Edible Oil

Application	SBEM Solution
Raw Material Storage	Paddle Level Switch, 135 LC, Float Type Level Switch, 137EA
Cleaning, Dehulling	Paddle Level Switch, 135 LC, Capacitance Level Switch, 114 MLS
Crush, Cooking, Expelling	Capacitance Level Switch, 114 MLS, Float type w Level Switch, 137EA, Displacer Type Level Switch 137 D
Refining, Deodorising	Side Mounted Float type Level Switch, 137EA, Displacer Type Level Switch 137 D, Capacitance Level Switch, 114 MLS
Oil Storage	
Hydrogenation	
Liquid Extraction	

Product Overview

Closed Pipe Flow Meters / Accessories



Electromagnetic
151MFM


Battery Operated
Electromagnetic
Flow Meter 151 MFMB

Ultrasonic Flow Meter
153 UCW

Multipath Ultrasonic Flow Meter
153 MUF

Residential Water
Meter 153 RWM

Level Indicators & Transmitters

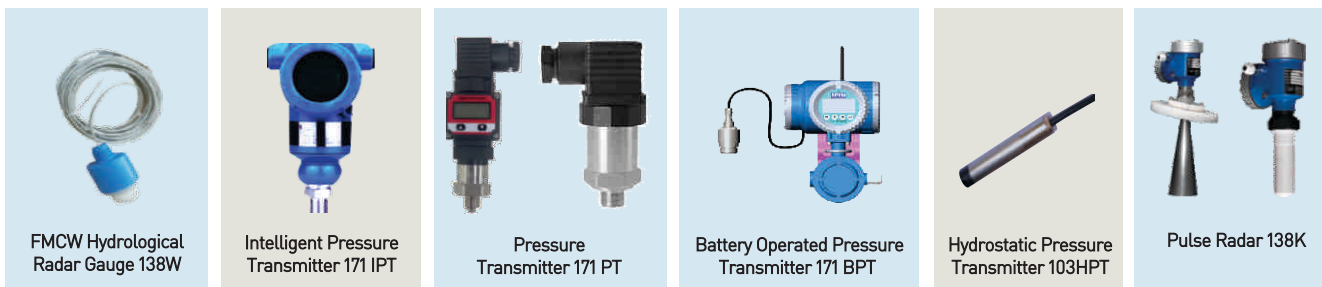

FMCW Hydrological
Radar Gauge 138W

Intelligent Pressure
Transmitter 171 IPT


Pressure
Transmitter 171 PT

Battery Operated Pressure
Transmitter 171 BPT

Hydrostatic Pressure
Transmitter 103HPT

Pulse Radar 138K

Tank Gauging Systems

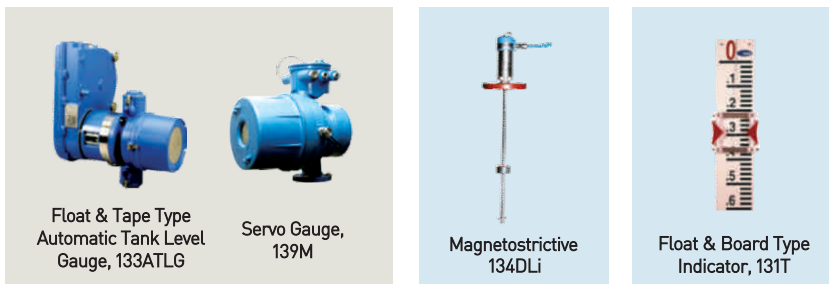

Float & Tape Type
Automatic Tank Level
Gauge, 133ATLG

Servo Gauge,
139M

Magnetostrictive
134DLi

Float & Board Type
Indicator, 131T

Open Channel Flow Meters



Ultrasonic Level
Transmitter
136ULT

Loss of Head Indicator-
Transmitter, 104LOH

Capacitance Based
Rate of Flow
Transmitter 104ROF

Tank gauging solutions

- Servo (139M) based, Float & Tape type level gauges (133ATLG) based, Magnetostrictive [134DLi] based etc.
- Tank farm management systems with field gauges, control room unit and SBTfMS software
- Site survey, project planning, detailed engineering, execution, installation & commissioning, support & training

• Solutions for solids and liquids

• Multiple technologies

• Multiple segments

• Multiple parameters

• Multiple applications

Site Installations

SBEM ensures the Highest Standards & Quality of Measurements



NABL Accredited Flow Laboratory ISO / IEC 17025



Certificate No.:
CC-2440





SBEM Pvt. Ltd.

Gat No. 326, Shriram Nagar, Gaud Dara Road,
Khedshivapur, Pune-412 205. Ph.: 02113-299 298
Email : sales@sbem.co.in Web. : www.sbem-india.com



Pune

pune@sbem.co.in

Mumbai

mumbai@sbem.co.in

Chennai

Chennai@sbem.co.in

New Delhi

newdelhi@sbem.co.in